



# MUR-LOK®

Fittings, Valves & Tubing

MANUFACTURED BY G.A. MURDOCK, INC.




MADE IN USA

- Available in retail or bulk packaging
- Custom labeling, color and kitting options
- Manufactured and shipped from Madison, SD 57042



## MUR-LOK® POLYPROPYLENE FITTINGS


- **Body Material:**  
White Polypropylene  
Black Polypropylene (UV Resistant)
- **O-rings:**  
Dual EPDM standard, optional fluorocarbon for chemical resistance
- **Tube Outer Diameter (OD):**  
1/4", 5/16", 3/8", 1/2"
- **Connection Types:**  
Quick-connect, NPT, NPSM, UNEF, UNS, stem, barb, flare, garden hose (GHT), compression
- **Certifications:**  
Certified by WQA to NSF/ANSI Standard 58
- **Temperatures & Pressures:**  
150 psi @ 70° F  
60 psi @ 140° F

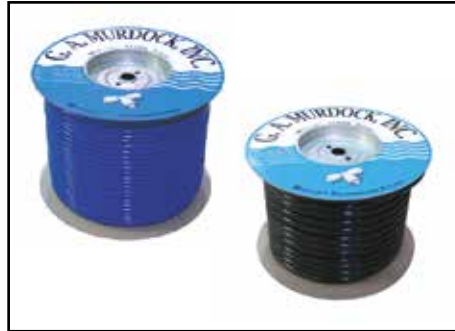

## MUR-LOK® LLDPE POLYETHYLENE TUBING

- **Material:**  
Linear low-density polyethylene (LLDPE)
- **Colors:**  
Natural (Semi-transparent), Black (UV Resistant), White, Blue, Red, Orange, Yellow, Green
- **Outer Diameter (OD):**  
1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
- **Certifications:**  
Certified by WQA to NSF/ANSI Standard 58 (1/4" - 1/2" sizes only)
- **Customization Options:**  
Colors, printing, lengths, and private labeling are available

Tubing Temperatures	
Tube OD	psi @ °F
1/4", 5/16", 3/8"	230 @ 70°F 120 @ 150°F
1/2"	150 @ 70°F 90 @ 150°F
5/8"	100 @ 70°F
3/4"	60 @ 70°F

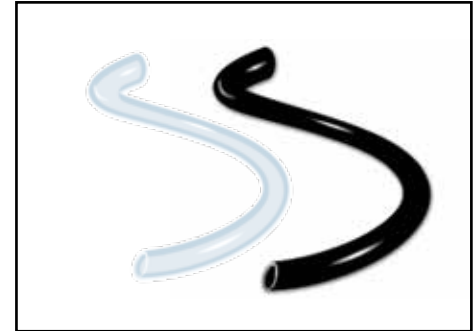

## MUR-LOK® FLEXIBLE PVC DRAIN LINE

- **Material and Color:**  
Black PVC (UV Resistant)  
Natural PVC (Clear)
- **Inner Diameter (ID):**  
1/2", 5/8"
- **Wall Thickness:**  
1/8"
- **Usage:**  
Designed for use as drain line on water softeners. Very flexible with excellent kink resistance. Attach with barbed connectors and hose clamps.

Drain Line Temperatures	
Tube OD	psi @ °F
3/4", 7/8"	40 @ 70°F Max: 170 °F Min: 20 °F



## MUR-LOK® PVC BALL VALVES

- 1/4" - 7/8" Outer diameter connections
- Quick-connect, male/female NPT, stem and compression nut connections
- Dual EPDM o-rings
- BPA-Free & FDA approved materials
- Custom handle colors available



## MUR-LOK® FEED LINE SOLUTIONS

- Tube connections: 1/4" - 1/2" OD
- Easily add a feed line to existing under-sink valves or plumbing pipes



## MUR-LOK® DRAIN II AIR GAP ADAPTER

- 1/4", 3/8" or 1/2" Connections
- Connect up to 2 drain lines
- Available in white PVC or black ABS

## MUR-LOK® DRAIN SADDLE

- Single 1/4" or 3/8" Connection
- Fits 1.25" or 1.5" sanitary drain pipe

For spec sheets and more information visit: <https://order.gamurdock.com/solutions/mfg>